

# M400K Conventional Callpoint



---

## Model Available

M400K

---

## Description

The M400K is designed to provide a manual interface for causing an alarm on the fire alarm system. The two wire circuit design allows remote communication with the monitoring control panel while also providing a localized LED.

---

## Specifications

Operating Temperature: 0°C-50°C

Current Rating: Max. Alarm Current- 30 mA


---

## Mounting Arrangements


The M400K is designed for indoor application. If hazardous or external application is desired, please contact your supplier for additional application recommendations.

Flush: Will fit to standard 76x76mm<sup>2</sup> box ( 60mm center) .

# Mechanical Specifications

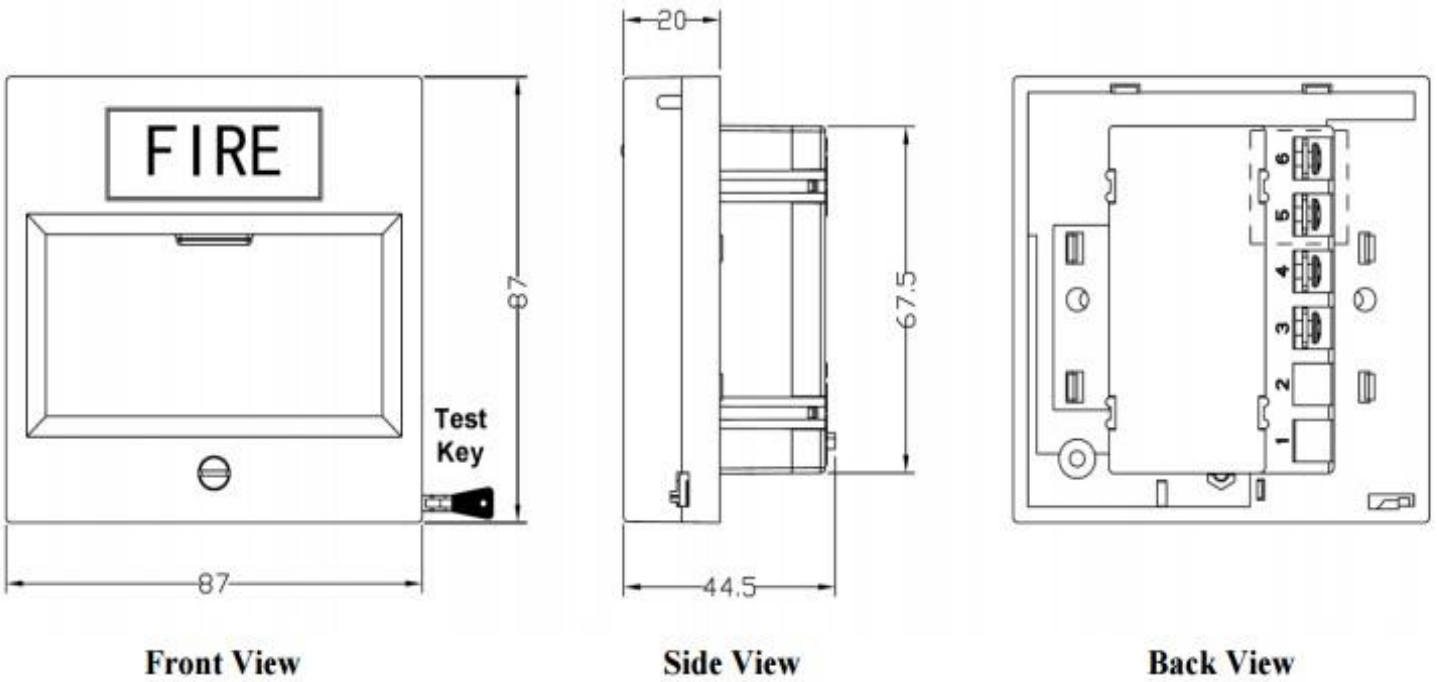

# Wiring Diagram

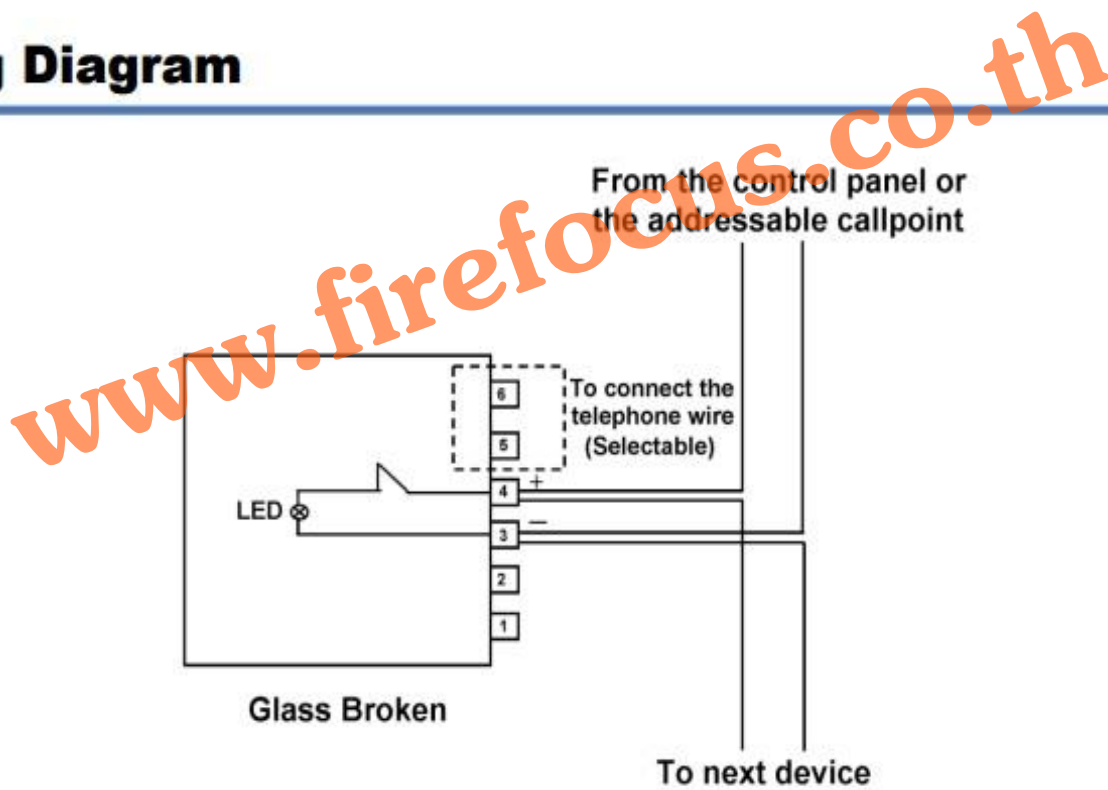

# Ordering Information

Ordering Model Number	Product Description	UOM
M400K	Conventional Callpoint	ea.