

Manual Call Point

Fire Manual Station/Call Point(Indoor)

ISO 9001 • CE Approved

Description

This fire manual station/call point can quickly transmit a signal to the fire receiver terminals or the repeaters while the button under a transparent protective cover has been pushed at the first finding of a fire accident. (This signal is beyond the accumulated time limitation.) There is a light over the button. The light will light up as a signal has been exactly received by the receiver terminal. There is also a telephone jack for telephone communication with attendant at the fire receiver terminal.

PBL(FRONT).jpg-1.jpg

Specifications

Rated Voltage	DC-24V	Weight	Approx 158g
Dimensions	140mm(Dia) X (H)	Color	Red


Advantages

1. Auto-Return by pushing button, no need to disassemble the main body.
2. Response light available to identify the operation completed.
3. Reinforced transparent protective cover is reusable.
4. All plastics are fire-proof, light, convenient and stylish.
5. Outside cord distribution with terminators to ease on work.

Mounting



YFM-01

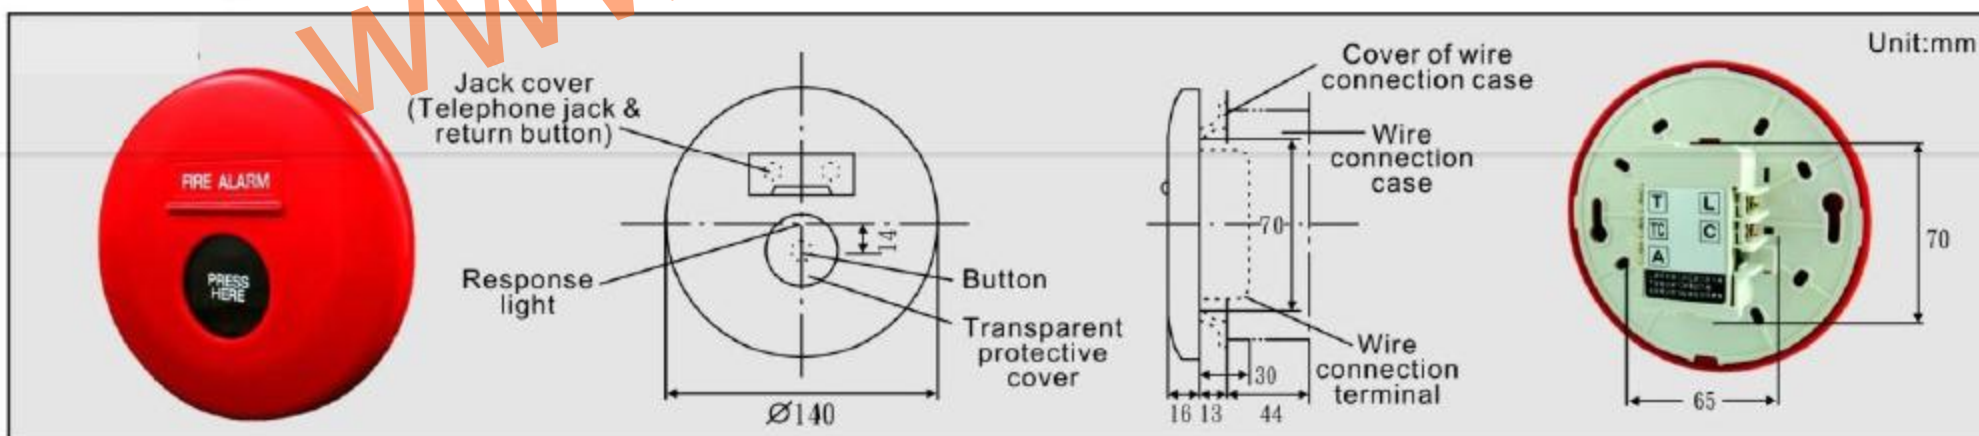

Fire Alarm Complex

- The Fire Alarm Complex is a steel box, in which there are indicating lamp, alarm bell and fire manual station/call point. In order to match the installation requirement, two types of surface mounting and recess mounting type are developed. They can also be installed uprightly or transversely. Rush the button on fire manual station/call point as soon as a fire accident found, The signal will be immediately transmitted to the fire receiver terminal. At the same time, the fire alarm bell will be ringing and the indicating lamp will be also twinkling to give a warning.

